

CE | ISO13485



产品目录
PRODUCTS CATALOGUE

COSON

■ 优质产品 ■ 科学管理 ■ 以人为本 ■ 追求卓越
Quality products, Scientific management, People-oriented, Seek excellent

Version: 2025

公司简介 Company Profile

公司概况

厦门中科兴医疗器械有限公司是一家国家级高新技术企业，成立于2012年，位于风景秀丽的海上花园城市厦门。专业从事骨科植入物产品研发、生产、销售和服务。

公司本着高起点、高科技、高标准、高质量的企业管理理念和团结奋进努力创新的企业精神，在加快研发骨科医疗器械的同时，不断开发具有自主知识产权的新技术、新产品。努力拓展新渠道，开发新领域，使企业再攀新台阶。

公司坚持以“优质产品，科学管理；以人为本，追求卓越”为质量方针。以“用户需求”为最终目标，以“用心服务”为指导原则。拥有拥有一流的先进加工设备和完善的质量管理体系，已获得CE、ISO13485等多项认证。

通过企业的不断追求和努力，中科兴致力于建设成为国内外有影响力的一流骨科医疗器械生产企业。

Company profile

Xiamen COSON Medical Instruments Co., Ltd. was established in 2012. Specializes in the design, manufacture and sale of orthopedic implants.


In line with the enterprise management concept of high starting point, high technology, high standard and high quality and the enterprise spirit of unity and endeavor to innovate, the company is accelerating the research and development of orthopaedic medical instruments and at the same time, constantly developing new technologies and new products with independent intellectual property rights. Efforts to expand new channels, the development of new areas, so that enterprises to climb a new level.

The company adhere to the "quality products, scientific management; People-oriented, the pursuit of excellence" for the quality policy. To "user demand" as the ultimate goal, to "heart service" as the guiding principle. With first-class advanced processing Instruments and perfect quality management system, the company has obtained CE, ISO13485 and other certifications.

Through the continuous pursuit and efforts of the enterprise, COSON is committed to building itself into an influential first-class orthopaedic medical device manufacturer at home and abroad.

人体骨骼图

Skeleton

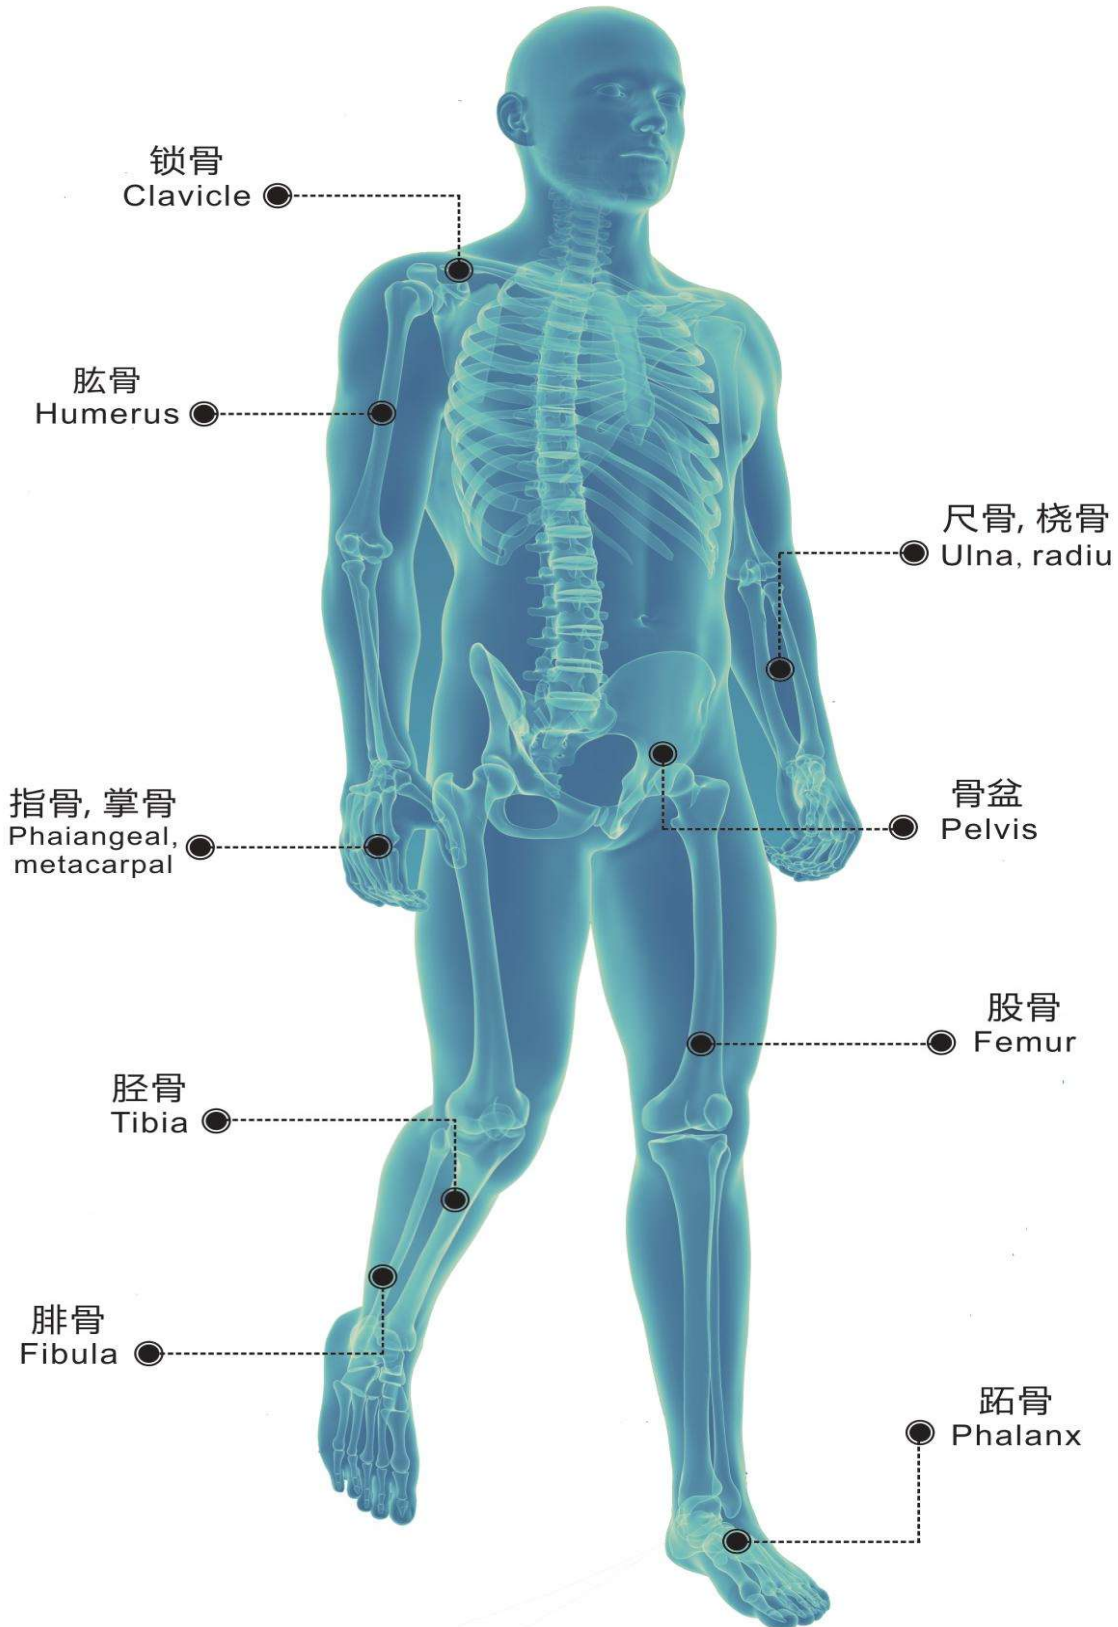

厦门中科兴医疗器械有限公司

Xiamen COSON Medical Instruments CO.,Ltd

地址：福建省厦门市海沧区西园路89号二层

Add: Second Floor, NO.89 Xiyuan Road, Haicang District,
Xiamen , Fujian, China

Postal Code: 361100

Http: www.xmcoson.com

Copyright ©. All Rights Reserved.

Tel/Fax: +86-159-8085-7026

Email: xf.sun@xmcoson.com

Wechat/Whatsapp:+86-159-8085-7026



Website



Wechat



Whatsapp



Alibaba Store

2.0 Microl Straight Locking Plate- I

Model: **ZSA18**

Material: Pure Titanium

Thickness: 1.0mm

Width: 4.5mm

Fitted Screw: Φ 2.0 Self Tapping Locking Screws, Φ 2.0 Full Thread Metallic Bone Screw

Scope of application: Phalangeal, metacarpal fracture fixation

Holes	Length (mm)	Product NO.
4	21	20450004
6	31	20450006
8	41	20450008
10	51	20450010
12	61	20450012



2.0 Microl T Locking Plate- III

Model: **YSA115**

Material: Pure Titanium

Head thickness: 1.0mm, head width: 10.0mm

Shaft thickness: 1.0mm, shaft width: 4.5mm

Fitted Screw: Φ 2.0 Self Tapping Locking Screws, Φ 2.0 Full Thread Metallic Bone Screw

Scope of application: Phalangeal, metacarpal fracture fixation

Holes	Length (mm)	Product NO.
2	16.5	20460002
3	22	20460003
4	27.5	20460004
5	33	20460005
6	38.5	20460006
7	44	20460007
8	49.5	20460008
10	60.5	20460010



2.0 Microl T Locking Plate- I

Model: **YSA113**

Material: Pure Titanium

Head thickness: 1.0mm, head width: 13.0mm

Shaft thickness: 1.0mm, shaft width: 4.5mm

Fitted Screw: Φ 2.0 Self Tapping Locking Screws, Φ 2.0 Full Thread Metallic Bone Screw

Scope of application: Phalangeal, metacarpal fracture fixation

Holes	Length (mm)	Product NO.
2	18	20470002
3	23.5	20470003
4	29	20470004
5	34.5	20470005
6	40	20470006
7	45.5	20470007



2.0 Microl L Locking Plate- IV

Model: **YSA112**

Material: Pure Titanium

Head thickness: 1.0mm, head width: 11.0 mm

Shaft thickness: 1.0mm, shaft width: 4.5mm

Fitted Screw: Φ 2.0 Self Tapping Locking Screws, Φ 2.0 Full Thread Metallic Bone Screw

Scope of application: Phalangeal, metacarpal fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
2	R	15.5	20482002
3	R	21	20482003
4	R	26.5	20482004
5	R	32	20482005
6	R	37.5	20482006
7	R	43	20482007
2	L	15.5	20481002
3	L	21	20481003
4	L	26.5	20481004
5	L	32	20481005
6	L	37.5	20481006
7	L	43	20481007



2.0 Microl L Locking Plate- III

Model: **YSA111**

Material: Pure Titanium

Head thickness: 1.0mm, head width: 10.0mm

Shaft thickness: 1.0mm, shaft width: 4.5mm

Fitted Screw: Φ 2.0 Self Tapping Locking Screws, Φ 2.0 Full Thread Metallic Bone Screw

Scope of application: Phalangeal, metacarpal fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
2	R	19	20492002
3	R	24.5	20492003
4	R	30	20492004
5	R	35.5	20492005
6	R	41	20492006
7	R	46.5	20490007
2	L	19	20491002
3	L	24.5	20491003
4	L	30	20491004
5	L	35.5	20491005
6	L	41	20491006
7	L	46.5	20491007



Clavicular Variable Angle Locking Plate

Model: **YSA41**

Material: Pure Titanium

Thickness: 3.5mm

Width: 10.0mm

Holes: Polygonal multi-directional locking screw hole

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Clavicular fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
6	R	71	21312006
7	R	83	21312007
8	R	94	21312008
9	R	104	21312009
10	R	116	21312010
11	R	127	21312011
12	R	138	21312012
6	L	71	21311006
7	L	83	21311007
8	L	94	21311008
9	L	104	21311009
10	L	116	21311010
11	L	127	21311011
12	L	138	21311012



Distal Clavicular Variable Angle Locking Plate

Model: **YSB42**

Material: Pure Titanium

Head thickness: 2.5mm, head width: 16.0mm

Shaft thickness: 3.1mm, shaft width: 10.0mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head, $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Lateral clavicular fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	64	20382003
4	R	76	20382004
5	R	88	20382005
6	R	100	20382006
7	R	113	20382007
8	R	125	20382008
3	L	64	20381003
4	L	76	20381004
5	L	88	20381005
6	L	100	20381006
7	L	113	20381007
8	L	125	20381008



Clavicular Hook Variable Angle Locking Plate

Material: Pure Titanium

Hook height: 15/18mm, hook length: 18.2mm

Head thickness: 1.8mm, head width: 18.5mm

Shaft thickness: 2.8mm, shaft width: 10.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Reduction and fixation of acromioclavicular joint dislocation

Model: **YSB44-01**

Holes	Left and Right	Length (mm)	Product NO.
3(15mm)	R	57	20962003
4(15mm)	R	71	20962004
5(15mm)	R	85	20962005
6(15mm)	R	99	20962006
7(15mm)	R	113	20962007
8(15mm)	R	127	20962008

3(15mm)	L	51	20961003
4(15mm)	L	71	20961004
5(15mm)	L	85	20961005
6(15mm)	L	99	20961006
7(15mm)	L	113	20961007
8(15mm)	L	127	20961008

Model: **YSB44-02**

3(18mm)	R	57	20972003
4(18mm)	R	71	20972004
5(18mm)	R	85	20972005
6(18mm)	R	99	20972006
7(18mm)	R	113	20972007
8(18mm)	R	127	20972008

3(18mm)	L	57	20971003
4(18mm)	L	71	20971004
5(18mm)	L	85	20971005
6(18mm)	L	99	20971006
7(18mm)	L	113	20971007
8(18mm)	L	127	20971008



Proximal Humeral Variable Angle Locking Plate

Model: YSB36

Material: Pure Titanium

Head thickness: 2.2mm, head width: 20.0mm

Shaft thickness: 3.5mm, shaft width: 12.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Proximal humeral fracture fixation

Holes	Length (mm)	Product NO.
3	95	20040003
4	109	20040004
5	123	20040005
6	137	20040006
7	151	20040007
8	165	20040008
9	179	20040009
10	193	20040010
11	207	20040011
12	221	20040012
13	235	20040013



Greater Tubercle Humeral Locking Plate

Model: YSA07

Material: Pure Titanium

Head thickness: 2.0mm, head width: 26.0mm

Shaft thickness: 2.5mm, shaft width: 12.0mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head, $\Phi 2.7$ Full Thread Metallic Bone Screw

$\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Greater tubercle humeral fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
5	R	41	20782005
5	L	41	20781005



Distal Medial Humeral Variable Angle Locking

Model: YSB30

Material: Pure Titanium

Head thickness: 1.5mm, head width: 11.0mm

Shaft thickness: 3.0mm, shaft width: 11.5mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head, $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Distal medial humeral fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	64	20322003
5	R	87	20322005
7	R	112	20322007
9	R	137	20322009
11	R	162	20322011
13	R	187	20322013
3	L	64	20321003
5	L	87	20321005
7	L	112	20231007
9	L	137	20321009
11	L	162	20321011
13	L	187	20321013



Distal Lateral Humeral Variable Angle Locking Plate

Model: YSB28

Material: Pure Titanium

Head thickness: 2.0mm, head width: 21.28mm

Shaft thickness: 3.0mm, shaft width: 11.5mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head, $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Distal lateral humeral fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	74	20812003
5	R	97	20812005
7	R	123	20812007
9	R	149	20812009
11	R	175	20812011
3	L	74	20811003
5	L	97	20811005
7	L	123	20811007
9	L	149	20811009
11	L	175	20811011



Olecranon Variable Angle Locking Plate

Model: YSB21

Material: Pure Titanium

Head thickness: 1.8mm, head width: 15.0mm

Shaft thickness: 2.5mm, shaft width: 10.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Reduction and fixation of olecranon fracture

Holes	Left and Right	Length (mm)	Product NO.
2	R	95	20252002
4	R	126	20252004
6	R	152	20252006
8	R	178	20252008
10	R	204	20252010
12	R	230	20252012
2	L	95	20251002
4	L	126	20251004
6	L	152	20251006
8	L	178	20251008
10	L	204	20251010
12	L	230	20251012



Olecranon Locking Plate- II

Model: YSC21

Material: Pure Titanium

Head thickness: 1.5mm, head width: 13.5mm, head holes: Polygonal multi-directional locking screw hole

Shaft thickness: 2.5mm, shaft width: 10.0mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head,

$\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Olecranon fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
2	R	93	21322002
4	R	119	21322004
6	R	145	21322006
8	R	171	21322008
10	R	197	21322010
12	R	123	21322012
2	L	93	21321002
4	L	119	21321004
6	L	145	21321006
8	L	171	21321008
10	L	197	21321010
12	L	123	21321012



Small Positive T Locking Plate- II

Model: YSB02

Material: Pure Titanium

Head thickness: 1.5mm, head width: 15.0mm

Shaft thickness: 1.5mm, shaft width: 8.0mm

Fitted Screw: Φ 2.7 Self Tapping Locking Screw round head, Φ 2.7 Full Thread Metallic Bone Screw

Scope of application: Proximal Radius fracture fixation

Holes	Length (mm)	Product NO.
3	41.5	20610003
4	51	20610004
5	60.5	20610005



Volar Distal Ulna Variable Angle Locking Plate

Model: YSD07

Material: Pure Titanium

Head thickness: 1.5mm, head width: 13.3mm

Shaft thickness: 1.5mm, shaft width: 8.0mm

Fitted Screw: Φ 2.7 Self Tapping Locking Screw round head, Φ 2.7 Full Thread Metallic Bone Screw

Scope of application: Volar distal ulna fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	48	21172003
5	R	66	21172005
3	L	48	21171003
5	L	66	21171005



Small Positive T Variable Angle Locking Plate

Model: **YSB01**

Material: Pure Titanium

Head thickness: 1.5mm, head width: 25.5mm

Shaft thickness: 1.5mm, shaft width: 10.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Volar Distal Radius fracture fixation

Holes	Length (mm)	Product NO.
3	47	20130003
4	58	20130004
5	69	20130005
6	80	20130006
7	91	30130007
8	102	30130008



Small Oblique T Variable Angle Locking Plate

Model: **YSA06**

Material: Pure Titanium

Head thickness: 1.5mm, head width: 25.0mm

Shaft thickness: 1.5mm, shaft width: 10.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Distal radius volar fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	52	20112003
4	R	63	20112004
5	R	74	20112005
6	R	85	20112006
3	L	52	20111003
4	L	63	20111004
5	L	74	20111005
6	L	85	20111006



Distal Radius Variable Angle Locking Plate

Model: **YSC14**

Material: Pure Titanium

Head thickness: 1.9mm, head width: 22.36mm

Shaft thickness: 2.4mm, shaft width: 8.0mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head, $\Phi 2.7$ Full Thread Metallic Bone Screw

Scope of application: Volar distal radius fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
2	R	47	20652002
3	R	55	20652003
4	R	63	20652004
5	R	71	20652005
7	R	89	20652007
9	R	107	20652009
2	L	47	20651002
3	L	55	20651003
4	L	63	20651004
5	L	71	20651005
7	L	89	20651007
9	L	107	20651009



Distal Radius Locking Plate- X

Model: **YSC17**

Material: Pure Titanium

Head thickness: 2.4mm, head width: 27.0mm

Shaft thickness: 2.4mm, shaft width: 7.2mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head, $\Phi 2.7$ Full Thread Metallic Bone Screw

Scope of application: Volar distal radius fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
2	R	47	21372002
3	R	55	21372003
4	R	63	21372004
5	R	71	21372005
7	R	89	21372007
9	R	107	21372009
2	L	47	21371002
3	L	55	21371003
4	L	63	21371004
5	L	71	21371005
7	L	89	21371007
9	L	107	21371009



One-Third Tubular Variable Angle Locking Plate

Model: **ZSA22**

Material: Pure Titanium

Thickness: 1.3mm

Width: 10.0mm

Holes: Polygonal multi-directional locking screw hole

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Ulna or radius, fibular fracture fixation

Holes	Length (mm)	Product NO.
4	49	21220004
5	61	21220005
6	73	21220006
7	85	21220007
8	97	21220008
9	109	21220009
10	121	21220010
12	145	21220012



Ulna and Radius Variable Angle Locking Plate

Model: **ZSB04**

Material: Pure Titanium

Thickness: 3.2mm

Width: 11.2mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Ulna or radius, fibular fracture fixation

Holes	Length (mm)	Product NO.
4	60	20010004
5	73	20010005
6	86	20010006
7	99	20010007
8	112	20010008
9	125	20010008
10	138	20010010
11	151	20010011
12	164	20010012



Humeral Straight Variable Angle Locking Plate

Model: **ZSB08**

Material: Pure Titanium

Thickness: 3.5mm

Width: 12.5mm

Fitted Screw: Φ 3.5 Self Tapping Locking Screw round head, Φ 3.5 Full Thread Metallic Bone Screw

Scope of application: humeral fracture fixation

Holes	Length (mm)	Product NO.
4	64.5	20690004
5	78.5	20690005
6	92.5	20690006
7	106.5	20690007
8	120.5	20690008
10	148.5	20690010
12	176.5	20690012
14	204.5	20690014



Reconstruction Variable Angle Locking Plate

Model: **ZSB15**

Material: Pure Titanium

Thickness: 3.1mm

Width: 10.0mm

Fitted Screw: Φ 3.5 Self Tapping Locking Screw round head, Φ 3.5 Full Thread Metallic Bone Screw, Φ 4.0 Cancellous Screws

Scope of application: Clavicle, Shoulder blade, Ulna or radius, Pelvic fracture fixation

Holes	Length (mm)	Product NO.
4	56	20020004
5	70	20020005
6	84	20020006
7	98	20020007
8	112	20020008
9	126	20020009
10	140	20020010
11	154	20020011
12	168	20020012
13	182	20020013
14	196	20020014
15	210	20020015
16	224	20020016



Arc Reconstruction Locking Plate- I

Model: **ZSA47**

Material: Pure Titanium

Thickness: 3.0mm

Width: 10.0mm

Fitted Screw: Φ 3.5 Self Tapping Locking Screw round head

Scope of application: Pelvic fracture fixation

Holes	Length (mm)	Product NO.
6	71	20280006
8	94	20280008
10	116	20280010
12	137	20280012
14	156	20280014
16	179	20280016



Tibial Variable Angle Locking Plate

Model: **ZSB06**

Material: Pure Titanium

Thickness: 4.5mm

Width: 14.0mm

Fitted Screw: Φ 5.0 Self Tapping Locking Screw round head, Φ 4.5 Full Thread Metallic Bone Screw

Scope of application: Tibial and humeral fracture fixation

Holes	Length (mm)	Product NO.
4	80	20090004
5	98	20090005
6	116	20090006
7	134	20090007
8	152	20090008
9	170	20090009
10	188	20090010
11	206	20090011
12	224	20090012
13	242	20090013
14	260	20090014
15	278	20090015
16	296	20090016



Femoral Locking Plate- II

Model: **ZSB10**

Material: Pure Titanium

Thickness: 5.5mm

Width: 17.5mm

Fitted Screw: $\Phi 5.0$ Self Tapping Locking Screw round head, $\Phi 4.5$ Full Thread Metallic Bone Screw

Scope of application: Femoral fracture fixation

Holes	Length (mm)	Product NO.
6	120	20680006
7	138	20680007
8	156	20680008
9	174	20680009
10	192	20680010
11	210	20680011
12	228	20680012
14	263	20680014
16	199	20680016



Proximal Femoral Locking Plate- IV

Model: **YSB53**

Material: Pure Titanium

Head thickness: 2.9mm, head width: 26.5mm

Shaft thickness: 5.5mm, shaft width: 17.5mm

Fitted Screw: $\Phi 5.0$ Self Tapping Locking Screw round head, $\Phi 6.5$ Cannulated Locking Screws, $\Phi 4.5$ Full Thread Metallic Bone Screw

Scope of application: Proximal femoral fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
2	R	113	20882002
4	R	149	20882004
6	R	185	20882006
8	R	221	20882008
10	R	257	20882010
12	R	293	20882012
14	R	328	20882014
2	L	113	20881002
4	L	149	20881004
6	L	185	20881006
8	L	221	20881008
10	L	257	20881010
12	L	293	20881012
14	L	328	20881014



Distal Lateral Femoral Variable Angle Locking Plate

Model: **YSB67**

Material: Pure Titanium

Head thickness: 2.8mm, head width: 33.5mm

Shaft thickness: 5.5mm, shaft width: 17.0mm

Fitted Screw: Φ 5.0 Self Tapping Locking Screw round head, Φ 4.5 Full Thread Metallic Bone Screw

Scope of application: Distal lateral femoral fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
5	R	162	20032005
7	R	201	20032007
9	R	241	20032009
11	R	280	20032011
13	R	320	20032013
15	R	360	20032015
5	L	162	20031005
7	L	201	20031007
9	L	241	20031009
11	L	280	20031011
13	L	320	20031013
15	L	360	20031015



Distal Medial Femoral Locking Plate

Model: **YSB66**

Material: Pure Titanium

Head thickness: 2.8mm, head width: 36.0mm

Shaft thickness: 5.5mm, shaft width: 17.0mm

Fitted Screw: Φ 5.0 Self Tapping Locking Screw round head, Φ 4.5 Full Thread Metallic Bone Screw

Scope of application: Distal medial femoral fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	97	20832003
5	R	133	20832005
7	R	169	20832007
9	R	205	20832009
3	L	97	20831003
5	L	133	20831005
7	L	169	20831007
9	L	205	20831009



Proximal Lateral Tibial Variable Angle Locking Plate

Model: **YSB73**

Material: Pure Titanium

Head thickness: 3.2mm, head width: 24.0mm

Shaft thickness: 4.5mm, shaft width: 16.0mm,

Fitted Screw: $\Phi 5.0$ Self Tapping Locking Screw round head, $\Phi 4.5$ Full Thread Metallic Bone Screw

Scope of application: Proximal lateral tibial fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	103	20232003
5	R	141	20232005
7	R	181	20232007
9	R	221	20232009
11	R	261	20232011
13	R	301	20232013
3	L	103	20231003
5	L	141	20231005
7	L	181	20231007
9	L	221	20231009
11	L	261	20231011
13	L	301	20231013



Proximal Medial Tibial Locking Plate- II

Model: **YSA85**

Material: Pure Titanium

Head thickness: 1.9mm, head width: 28.3mm

Shaft thickness: 3.5mm, shaft width: 11.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Proximal medial tibial fracture fixation

Holes	Length (mm)	Product NO.
3	77	21380003
5	103	21380005
7	129	21380007
9	155	21380009
11	181	21380011



T Variable Angle Locking Plate

Model: **YSB80**

Material: Pure Titanium

Head thickness: 3.3mm, head width: 36.5mm

Shaft thickness: 3.3mm, shaft width: 16.0mm

Fitted Screw: $\Phi 5.0$ Self Tapping Locking Screw round head, $\Phi 4.5$ Full Thread Metallic Bone Screw

Scope of application: Proximal tibial fracture fixation

Holes	Length (mm)	Product NO.
3	70	20150003
4	86	20150004
5	102	20150005
6	118	20150006
7	134	20150007
8	150	20150008



L Variable Angle Locking Plate

Model: **YSB77**

Material: Pure Titanium

Head thickness: 2.5mm, head width: 34.0mm

Shaft thickness: 2.5mm, shaft width: 16.0mm

Fitted Screw: $\Phi 5.0$ Self Tapping Locking Screw round head, $\Phi 4.5$ Full Thread Metallic Bone Screw

Scope of application: Proximal tibial fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	72	20162003
4	R	88	20162004
5	R	104	20162005
6	R	120	20162006
7	R	136	20162007
8	R	152	20162008
3	L	72	20161003
4	L	88	20161004
5	L	104	20161005
6	L	120	20161006
7	L	136	20161007
8	L	152	20161008



Distal Lateral Tibial Locking Plate- I

Model: **YSB86**

Material: Pure Titanium

Head thickness: 2.5mm, head width: 34.0mm

Shaft thickness: 3.5mm, shaft width: 13.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Distal lateral tibial fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
5	R	86	20552003
7	R	112	20552005
9	R	138	20552007
11	R	164	20552009
13	R	190	20552011
15	R	210	20552013
5	L	86	20551003
7	L	112	20551005
9	L	138	20551007
11	L	164	20551009
13	L	190	2055011
15	L	210	20551013



Distal Medial Tibial Variable Angle Locking Plate

Model: **YSB91**

Material: Pure Titanium

Head thickness: 1.8mm, head width: 21.7mm

Shaft thickness: 3.5mm, shaft width: 12.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Distal medial tibial fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
4	R	114	20082004
6	R	140	20082006
8	R	166	20082008
10	R	192	20082010
12	R	218	20082012
14	R	244	20082014
4	L	114	20081004
6	L	140	20081006
8	L	166	20081008
10	L	192	20081010
12	L	218	20081012
14	L	244	20081014



Distal Fibular Locking Plate- I

Model: **YSB95**

Material: Pure Titanium

Head thickness: 1.5mm, head width: 15.0mm

Shaft thickness: 2.0mm, shaft width: 10.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Distal fibular fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	72	20372003
4	R	85	20372004
5	R	98	20372005
6	R	111	20372006
7	R	124	20372007
8	R	137	20372008
3	L	72	20371003
4	L	85	20371004
5	L	98	20371005
6	L	111	20371006
7	L	124	20371007
8	L	137	20371008



Distal Fibular Variable Angle Locking Plate

Model: **YSB100**

Material: Pure Titanium

Head thickness: 1.1mm, head width: 17.0mm

Shaft thickness: 2.0mm, shaft width: 10.0mm

Fitted Screw: $\Phi 2.7$ Self Tapping Locking Screw round head, $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Distal fibular fracture fixation

Holes	Left and Right	Length (mm)	Product NO.
3	R	76	20892003
4	R	89	20892004
5	R	102	20892005
6	R	115	20892006
7	R	128	20892007
9	R	154	20892009
11	R	180	20892011
13	R	206	20892013
3	L	76	20891003
4	L	89	20891004
5	L	102	20891005
6	L	115	20891006
7	L	128	20891007
9	L	154	20891009
11	L	180	20891011
13	L	206	20891013



Calcaneal Variable Angle Locking Plate

Material: Pure Titanium

Thickness: 1.8mm

Width: 8.0mm

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Calcaneal fracture fixation

Model: **YSA106**

Holes	Left and Right	Length (mm)	Product NO.
13	R	56	21092013
13	L	56	21091013

Model: **YSB106**

13	R	62	21102013
13	L	62	21101013

Model: **YSD106**

13	R	70	21112013
13	L	70	21111013



Abatomic Calcaneal Locking Plate- VI

Material: Pure Titanium

Thickness: 1.8mm

Width: 8.0mm

Holes: Polygonal multi-directional locking screw hole

Fitted Screw: $\Phi 3.5$ Self Tapping Locking Screw round head, $\Phi 3.5$ Full Thread Metallic Bone Screw

Scope of application: Calcaneal fracture fixation

Model: **YSA107**

Holes	Left and Right	Length (mm)	Product NO.
12	R	52	21062012
12	L	52	21061012

Model: **YSB107**

12	R	60	20732012
12	L	60	20731012

Model: **YSD107**

12	R	68	21072012
12	L	68	21071012



1.5 Full Thread Metallic Bone Screw

Model: **HAQ06**

Material: Ti-6Al-4V

Head diameter: 3.5mm

Screwdriver: T5

Erron diameter: 1.0mm

Screw thread spacing: 0.5mm

Screw thread length: 0.5mm

Diameter (mm)	Length (mm)	Product NO.
Φ1.5	6	30330006
Φ1.5	8	30330008
Φ1.5	10	30330010
Φ1.5	12	30330012
Φ1.5	14	30330014
Φ1.5	16	30330016
Φ1.5	18	30330018
Φ1.5	20	30330020
Φ1.5	22	30330022



2.0 Full Thread Metallic Bone Screw

Model: **HAQ06**

Material: Ti-6Al-4V

Head diameter: 4.0mm

Screwdriver: T6

Erron diameter: 1.3mm

Screw thread spacing: 0.6mm

Screw thread length: 0.7mm

Diameter (mm)	Length (mm)	Product NO.
Φ2.0	6	30140006
Φ2.0	8	30140008
Φ2.0	10	30140010
Φ2.0	12	30140012
Φ2.0	14	30140014
Φ2.0	16	30140016
Φ2.0	18	30140018
Φ2.0	20	30140020
Φ2.0	22	30140022
Φ2.0	24	30140024
Φ2.0	26	30140026



2.4 Full Thread Metallic Bone Screw

Model: **HAQ06**

Material: Ti-6Al-4V

Head diameter: 5.0mm

Screwdriver: T8

Erron diameter: 1.7mm

Screw thread spacing: 1.0mm

Screw thread length: 0.7mm

Diameter (mm)	Length (mm)	Product NO.
Φ2.4	6	30150006
Φ2.4	8	30150008
Φ2.4	10	30150010
Φ2.4	12	30150012
Φ2.4	14	30150014
Φ2.4	16	30150016
Φ2.4	18	30150018
Φ2.4	20	30150020
Φ2.4	22	30150022
Φ2.4	24	30150024
Φ2.4	26	30150026
Φ2.4	28	30150028
Φ2.4	30	30150030



2.7 Full Thread Metallic Bone Screw

Model: **HAQ06**

Material: Ti-6Al-4V

Head diameter: 5.0mm

Screwdriver: T8

Erron diameter: 1.9mm

Screw thread spacing: 1.0mm

Screw thread length: 0.8mm

Diameter (mm)	Length (mm)	Product NO.
Φ2.7	10	30210010
Φ2.7	12	30210012
Φ2.7	14	30210014
Φ2.7	16	30210016
Φ2.7	18	30210018
Φ2.7	20	30210020
Φ2.7	22	30210022
Φ2.7	24	30210024
Φ2.7	26	30210026
Φ2.7	28	30210028
Φ2.7	30	30210030



3.5 Full Thread Metallic Bone Screw

Model: **HAQ06**

Material: Ti-6Al-4V

Head diameter: 6.0mm

Screwdriver: T15

Erron diameter: 2.4mm

Screw thread spacing: 1.25mm

Screw thread length: 1.1mm

Diameter (mm)	Length (mm)	Product NO.
Φ3.5	10	30180010
Φ3.5	12	30180012
Φ3.5	14	30180014
Φ3.5	16	30180016
Φ3.5	18	30180018
Φ3.5	20	30180020
Φ3.5	22	30180022
Φ3.5	24	30180024
Φ3.5	26	30180026
Φ3.5	28	30180028
Φ3.5	30	30180030
Φ3.5	32	30180032
Φ3.5	34	30180034
Φ3.5	36	30180036
Φ3.5	38	30180038
Φ3.5	40	30180040
Φ3.5	42	30180042
Φ3.5	44	30180044
Φ3.5	46	30180046
Φ3.5	48	30180048
Φ3.5	50	30180050
Φ3.5	55	30180055
Φ3.5	60	30180060
Φ3.5	65	30180065
Φ3.5	70	30180070



4.5 Full Thread Metallic Bone Screw

Model: **HAQ06**

Material: Ti-6Al-4V

Head diameter: 8.0mm

Screwdriver: T25

Erron diameter: 3.0mm

Screw thread spacing: 1.75mm

Screw thread length: 1.5mm

Diameter (mm)	Length (mm)	Product NO.
Φ4.5	18	30190018
Φ4.5	20	30190020
Φ4.5	22	30190022
Φ4.5	24	30190024
Φ4.5	26	30190026
Φ4.5	28	30190028
Φ4.5	30	30190030
Φ4.5	32	30190032
Φ4.5	34	30190034
Φ4.5	36	30190036
Φ4.5	38	30190038
Φ4.5	40	30190040
Φ4.5	42	30190042
Φ4.5	44	30190044
Φ4.5	46	30190046
Φ4.5	48	30190048
Φ4.5	50	30190050
Φ4.5	52	30190052
Φ4.5	54	30190054
Φ4.5	56	30190056
Φ4.5	58	30190058
Φ4.5	60	30190060
Φ4.5	65	30190065
Φ4.5	70	30190070
Φ4.5	75	30190075
Φ4.5	80	30190080



4.0 Half Thread Metallic Bone Screw

Model: **HBQ06**

Material: Ti-6Al-4V

Head diameter: 6.0mm

Screwdriver: T15

Screw shank diameter: 2.9mm

Error diameter: 1.9mm , Screw thread length: 2.1mm , Screw thread spacing: 1.75mm

Diameter (mm)	Length (mm)	Product NO.
Φ4.0	14	30230014
Φ4.0	16	30230016
Φ4.0	18	30230018
Φ4.0	20	30230020
Φ4.0	22	30230022
Φ4.0	24	30230024
Φ4.0	26	30230026
Φ4.0	28	30230028
Φ4.0	30	30230030
Φ4.0	32	30230032
Φ4.0	34	30230034
Φ4.0	36	30230036
Φ4.0	38	30230038
Φ4.0	40	30230040
Φ4.0	45	30230045
Φ4.0	50	30230050
Φ4.0	55	30230055
Φ4.0	60	30230060



4.0 Full Thread Metallic Bone Screw

Model: **HBQ06**

Material: Ti-6Al-4V

Head diameter: 6.0mm

Screwdriver: T15

Erron diameter: 1.9mm , Screw thread length: 2.1mm , Screw thread spacing: 1.75mm

Diameter (mm)	Length (mm)	Product NO.
Φ4.0	10	30220010
Φ4.0	12	30220012
Φ4.0	14	30220014
Φ4.0	16	30220016
Φ4.0	18	30220018
Φ4.0	20	30220020
Φ4.0	22	30220022
Φ4.0	24	30220024
Φ4.0	26	30220026
Φ4.0	28	30220028
Φ4.0	30	30220030
Φ4.0	32	30220032
Φ4.0	34	30220034
Φ4.0	36	30220036
Φ4.0	38	30220038
Φ4.0	40	30220040
Φ4.0	45	30220045
Φ4.0	50	30220050
Φ4.0	55	30220055
Φ4.0	60	30220060



6.5 Half Thread Metallic Bone Screw

Model: **HBQ06**

Material: Ti-6Al-4V

Head diameter: 8.0mm

Screwdriver: T25

Screw shank diameter: 4.5mm

Error diameter: 3.0mm, Screw thread length: 3.5mm, Screw thread spacing: 2.75mm

Diameter (mm)	Length (mm)	Product NO.
Φ6.5	30	30250030
Φ6.5	35	30250035
Φ6.5	40	30250040
Φ6.5	45	30250045
Φ6.5	50	30250050
Φ6.5	55	30250055
Φ6.5	60	30250060
Φ6.5	65	30250065
Φ6.5	70	30250070
Φ6.5	75	30250075
Φ6.5	80	30250080
Φ6.5	85	30250085
Φ6.5	90	30250090
Φ6.5	95	30250095
Φ6.5	100	30250100



6.5 Full Thread Metallic Bone Screw

Model: **HBQ06**


Material: Ti-6Al-4V

Head diameter: 8.0mm

Screwdriver: T25

Error diameter: 3.0mm, Screw thread length: 3.5mm, Screw thread spacing: 2.75mm

Diameter (mm)	Length (mm)	Product NO.
Φ6.5	30	30240030
Φ6.5	35	30240035
Φ6.5	40	30240040
Φ6.5	45	30240045
Φ6.5	50	30240050
Φ6.5	55	30240055
Φ6.5	60	30240060
Φ6.5	65	30240065
Φ6.5	70	30240070
Φ6.5	75	30240075
Φ6.5	80	30240080
Φ6.5	85	30240085
Φ6.5	90	30240090
Φ6.5	95	30240095
Φ6.5	100	30240100

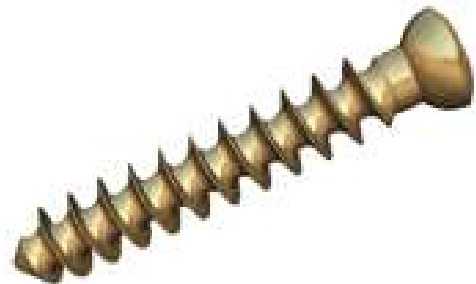

2.5 Cannulated Headless Compression Screw

Model: **KWJD**

Material: Ti-6Al-4V

Screwdriver: T6

Screw thread spacing: 0.7mm

Error diameter: 1.9mm, Screw thread length: 0.6mm

Head diameter: 2.8mm

Diameter (mm)	Length (mm)	Product NO.
Φ2.5	8	60130016
Φ2.5	10	60130018
Φ2.5	12	60130020
Φ2.5	14	60130022
Φ2.5	16	60130024
Φ2.5	18	60130026
Φ2.5	20	60130028
Φ2.5	22	60130030
Φ2.5	24	60130032
Φ2.5	26	60130034
Φ2.5	28	60130036
Φ2.5	30	60130038



3.0 Cannulated Dicephalous Compression Screw

Model: **KSJD II**

Material: Ti-6Al-4V

Screwdriver: T8

Screw thread spacing: 1.25mm

Error diameter: 1.9mm, Screw thread length: 1.1mm

Head diameter: 4.0mm

Diameter (mm)	Length (mm)	Product NO.
Φ3.0	14	60120014
Φ3.0	16	60120016
Φ3.0	18	60120018
Φ3.0	20	60120020
Φ3.0	22	60120022
Φ3.0	24	60120024
Φ3.0	26	60120026
Φ3.0	28	60120028
Φ3.0	30	60120030
Φ3.0	32	60120032
Φ3.0	34	60120034
Φ3.0	36	60120036
Φ3.0	48	60120038
Φ3.0	40	60120040



3.5 Cannulated Cancellous Screw

Model: **KJYD II**

Material: Ti-6Al-4V

Screwdriver: T15

Error diameter: 2.5mm, Screw thread length: 1.0mm


Screw thread spacing: 1,5mm

Head diameter: 6.0mm

Diameter (mm)	Length (mm)	Product NO.
Φ3.5	16	60010016
Φ3.5	18	60010018
Φ3.5	20	60010020
Φ3.5	22	60010022
Φ3.5	24	60010024
Φ3.5	26	60010026
Φ3.5	28	60010028
Φ3.5	30	60010030
Φ3.5	32	60010032
Φ3.5	34	60010034
Φ3.5	36	60010036
Φ3.5	38	60010038
Φ3.5	40	60010040
Φ3.5	42	60010042
Φ3.5	44	60010044
Φ3.5	46	60010046
Φ3.5	48	60010048
Φ3.5	50	60010050



Φ4.0 Washer

Product	Model	Material	Description	Product NO.
	Φ4.0	Ti-6Al-4V	For Φ3.5/ Φ4.0 Cannulated Cancellous Screw	60020000

4.0 Cannulated Cancellous Screw

Model: **KJYD II**

Material: Ti-6Al-4V

Screwdriver: T15

Error diameter: 2.8mm, Screw thread length: 1.2mm


Screw thread spacing: 1,5mm

Head diameter: 6.0mm

Diameter (mm)	Length (mm)	Product NO.
Φ4.0	16	60130016
Φ4.0	18	60130018
Φ4.0	20	60130020
Φ4.0	22	60130022
Φ4.0	24	60130024
Φ4.0	26	60130026
Φ4.0	28	60130028
Φ4.0	30	60130030
Φ4.0	32	60130032
Φ4.0	34	60130034
Φ4.0	36	60130036
Φ4.0	38	60130038
Φ4.0	40	60130040
Φ4.0	42	60130042
Φ4.0	44	60130044
Φ4.0	46	60130046
Φ4.0	48	60130048
Φ4.0	50	60130050
Φ4.0	55	60130055
Φ4.0	60	60130060



Φ4.0 Washer

Product	Model	Material	Description	Product NO.
	Φ4.0	Ti-6Al-4V	For Φ3.5/ Φ4.0 Cannulated Cancellous Screw	60020000

7.3 Cannulated Cancellous Screw

Material: Ti-6Al-4V

Screwdriver: T25

Error diameter: 4.8mm, Screw thread length: 2.5mm

Screw thread spacing: 2,75mm

Head diameter: 8.0mm

Model: **KJYD I**


Diameter (mm)	Thread length (mm)	Length (mm)	Product NO.
Φ7,3	32	50	60070050
Φ7,3	32	55	60070055
Φ7,3	32	60	60070060
Φ7,3	32	65	60070065
Φ7,3	32	70	60070070
Φ7,3	32	75	60070075
Φ7,3	32	80	60070080
Φ7,3	32	85	60070085
Φ7,3	32	90	60070090
Φ7,3	32	95	60070095
Φ7,3	32	100	60070100
Φ7,3	32	105	60070105
Φ7,3	32	110	60070110

Model: **KJYD II**

Φ7,3	16	50	60040050
Φ7,3	16	55	60040055
Φ7,3	16	60	60040060
Φ7,3	16	65	60040065
Φ7,3	16	70	60040070
Φ7,3	16	75	60040075
Φ7,3	16	80	60040080
Φ7,3	16	85	60040085
Φ7,3	16	90	60040090
Φ7,3	16	95	60040095
Φ7,3	16	100	60040100
Φ7,3	16	105	60040105
Φ7,3	16	110	60040110



Φ6.5/ Φ7.0 Washer

Product	Model	Material	Description	Product NO.
	Φ7.0	Ti-6Al-4V	For Φ6.5/ Φ7.3 Cannulated Cancellous Screw	60050000

1.5 Self Tapping Locking Screw

Model: **SHCL060101**

Material: Ti-6Al-4V

Head diameter: 2.8mm

Screwdriver: T5

Error diameter: 1.1mm

Screw thread spacing: 0.5mm

Screw thread length: 0.4mm

Diameter (mm)	Length (mm)	Product NO.
Φ1.5	6	30320006
Φ1.5	8	30320008
Φ1.5	10	30320010
Φ1.5	12	30320012
Φ1.5	14	30320014
Φ1.5	16	30320016
Φ1.5	18	30320018
Φ1.5	20	30320020
Φ1.5	22	30320022



2.0 Self Tapping Locking Screw

Model: **SHCL060102**

Material: Ti-6Al-4V

Head diameter: 3.0mm

Screwdriver: T6

Error diameter: 1.5mm

Screw thread spacing: 0.6mm

Screw thread length: 0.5mm

Diameter (mm)	Length (mm)	Product NO.
Φ2.0	6	30130006
Φ2.0	8	30130008
Φ2.0	10	30130010
Φ2.0	12	30130012
Φ2.0	14	30130014
Φ2.0	16	30130016
Φ2.0	18	30130018
Φ2.0	20	30130020
Φ2.0	22	30130022
Φ2.0	24	30130024
Φ2.0	26	30130026
Φ2.0	28	30130028
Φ2.0	30	30130030



2.4 Self Tapping Locking Screw round head

Model: **SHCQ060103**

Material: Ti-6Al-4V

Head diameter: 3.4mm; The locking angle changes: 5°, Compatible with polygonal multi-directional locking screw holes.

Screwdriver: T8

Erron diameter: 1.9mm

Screw thread spacing: 0.6mm

Screw thread length: 0.5mm

Diameter (mm)	Length (mm)	Product NO.
Φ2.4	6	30280006
Φ2.4	8	30280008
Φ2.4	10	30280010
Φ2.4	12	30280012
Φ2.4	14	30280014
Φ2.4	16	30280016
Φ2.4	18	30280018
Φ2.4	20	30280020
Φ2.4	22	30280022
Φ2.4	24	30280024
Φ2.4	26	30280026
Φ2.4	28	30280028
Φ2.4	30	30280030



2.7 Self Tapping Locking Screw round head

Model: **SHCQ060104**

Material: Ti-6Al-4V

Head diameter: 3.4mm;The locking angle changes: 15°,Compatible with polygonal multi-directional locking screw holes.

Screwdriver: T8

Erron diameter: 2.2mm

Screw thread spacing: 0.6mm

Screw thread length: 0.5mm

Diameter (mm)	Length (mm)	Product NO.
Φ2.7	10	30300010
Φ2.7	12	30300012
Φ2.7	14	30300014
Φ2.7	16	30300016
Φ2.7	18	30300018
Φ2.7	20	30300020
Φ2.7	22	30300022
Φ2.7	24	30300024
Φ2.7	26	30300026
Φ2.7	28	30300028
Φ2.7	30	30300030
Φ2.7	32	30300032
Φ2.7	34	30300034
Φ2.7	36	30300036
Φ2.7	38	30300038
Φ2.7	40	30300040
Φ2.7	45	30300045
Φ2.7	50	30300050



3.5 Self Tapping Locking Screw round head

Model: **SHCQ060105**

Material: Ti-6Al-4V

Head diameter: 4.6mm;The locking angle changes: 15°, Compatible with polygonal multi-directional locking screw holes.

Screwdriver: T15

Error diameter: 2.9mm

Screw thread spacing: 0.8mm

Screw thread length: 0.6mm

Diameter (mm)	Length (mm)	Product NO.
Φ3.5	10	30310010
Φ3.5	12	30310012
Φ3.5	14	30310014
Φ3.5	16	30310016
Φ3.5	18	30310018
Φ3.5	20	30310020
Φ3.5	22	30310022
Φ3.5	24	30310024
Φ3.5	26	30310026
Φ3.5	28	30310028
Φ3.5	30	30310030
Φ3.5	32	30310032
Φ3.5	34	30310034
Φ3.5	36	30310036
Φ3.5	38	30310038
Φ3.5	40	30310040
Φ3.5	42	30310042
Φ3.5	44	30310044
Φ3.5	46	30310046
Φ3.5	48	30310048
Φ3.5	50	30310050
Φ3.5	55	30310055
Φ3.5	60	30310060
Φ3.5	65	30310065
Φ3.5	70	30310070
Φ3.5	75	30310075
Φ3.5	80	30310080



5.0 Self Tapping Locking Screw round head

Model: **SHCQ060106**

Material: Ti-6Al-4V

Head diameter: 6.4mm; The locking angle changes: 15°, Compatible with polygonal multi-directional locking screw holes.

Screwdriver: T25

Erron diameter: 4.4mm

Screw thread spacing: 1.0mm

Screw thread length: 0.6mm

Diameter (mm)	Length (mm)	Product NO.
Φ5.0	14	30270014
Φ5.0	16	30270016
Φ5.0	18	30270018
Φ5.0	20	30270020
Φ5.0	22	30270022
Φ5.0	24	30270024
Φ5.0	26	30270026
Φ5.0	28	30270028
Φ5.0	30	30270030
Φ5.0	32	30270032
Φ5.0	34	30270034
Φ5.0	35	30270035
Φ5.0	36	30270036
Φ5.0	38	30270038
Φ5.0	40	30270040
Φ5.0	42	30270042
Φ5.0	44	30270044
Φ5.0	45	30270045
Φ5.0	46	30270046
Φ5.0	48	30270048
Φ5.0	50	30270050
Φ5.0	55	30270055
Φ5.0	60	30270060
Φ5.0	65	30270065
Φ5.0	70	30270070
Φ5.0	75	30270075
Φ5.0	80	30270080
Φ5.0	85	30270085
Φ5.0	90	30270090
Φ5.0	95	30270095
Φ5.0	100	30270100



6.5 Self Tapping Locking Screw

Model: **SHCL060106**

Material: Ti-6Al-4V

Head diameter: 8.5mm

Screwdriver: T25

Erron diameter: 5.2mm

Screw thread spacing: 2.2mm

Screw thread length: 1.3mm

Diameter (mm)	Length (mm)	Product NO.
Φ6.5	40	30260040
Φ6.5	45	30260045
Φ6.5	50	30260050
Φ6.5	55	30260055
Φ6.5	60	30260060
Φ6.5	65	30260065
Φ6.5	70	30260070
Φ6.5	75	30260075
Φ6.5	80	30260080
Φ6.5	85	30260085
Φ6.5	90	30260090
Φ6.5	95	30260095
Φ6.5	100	30260100
Φ6.5	105	30260105
Φ6.5	110	30260110



INTERTAN/PFNA/Gamma Nail, Short Nail

Model: **SDDKNIV**

Material: Ti-6Al-4V

Apitocollum-diaphyseal angle: 125°

The 5° mediolateral angle allows for a more lateral entry point at the tip of the greater trochanter. Head diameter: 15.2mm

Fitted Screw: ϕ 10.5 Lag Screw, ϕ 6.5 Compression Screw, ϕ 10.5 Helical Blade, ϕ 5.0 Locking Screw, Φ 10.5 Lag Screw (Exclusive use), End Cap, Locking End Cap.

Scope of application: Proximal femoral fracture fixation

Diameter	Left and Right	Length (mm)	Product NO.
ϕ 9.0	/	180	30420180
ϕ 9.0	/	200	30420200
ϕ 9.0	R	240	30422240
ϕ 9.0	L	240	30421240
Φ 10.0	/	180	30430180
Φ 10.0	/	200	30430200
Φ 10.0	R	240	30432240
Φ 10.0	L	240	30431240
Φ 11.0	/	180	30440180
Φ 11.0	/	200	30440200
Φ 11.0	R	240	30442240
Φ 11.0	L	240	30441240
Φ 12.0	/	180	30450180
Φ 12.0	/	200	30450200
Φ 12.0	R	240	30452240
Φ 12.0	L	240	30451240



INTERTAN/PFNA/Gamma Nail, Long Nail

Model: **SDDKNIV**

Material: Ti-6Al-4V

Apitocollum-diaphyseal angle: 125°

The 5° mediolateral angle allows for a more lateral entry point at the tip of the greater trochanter. Head diameter: 15.2mm.

Fitted Screw: ϕ 10.5 Lag Screw, ϕ 6.5 Compression Screw, ϕ 10.5 Helical Blade, ϕ 5.0 Locking Screw, ϕ 10.5 Lag Screw (Exclusive use), End Cap, Locking End Cap.

Scope of application: Proximal femoral fracture fixation and Femoral fracture fixation

Diameter	Left and Right	Length (mm)	Product NO.
ϕ 9.0	R	300	31412300
ϕ 9.0	R	320	31412320
ϕ 9.0	R	340	31412340
ϕ 9.0	R	360	31412360
ϕ 9.0	R	380	31412380
ϕ 9.0	R	400	31412400
ϕ 9.0	R	420	31412420
ϕ 9.0	L	300	31411300
ϕ 9.0	L	320	31411320
ϕ 9.0	L	340	31411340
ϕ 9.0	L	360	31411360
ϕ 9.0	L	380	31411380
ϕ 9.0	L	400	31411400
ϕ 9.0	L	420	31411420
ϕ 10.0	R	300	31422300
ϕ 10.0	R	320	31422320
ϕ 10.0	R	340	31422340
ϕ 10.0	R	360	31422360
ϕ 10.0	R	380	31422380
ϕ 10.0	R	400	31422400
ϕ 10.0	R	420	31422420
ϕ 10.0	L	300	31421300
ϕ 10.0	L	320	31421320
ϕ 10.0	L	340	31421340
ϕ 10.0	L	360	31421360
ϕ 10.0	L	380	31421380
ϕ 10.0	L	400	31421400
ϕ 10.0	L	420	31421420
ϕ 11.0	R	300	31432300
ϕ 11.0	R	320	31432320
ϕ 11.0	R	340	31432340
ϕ 11.0	R	360	31432360
ϕ 11.0	R	380	31432380
ϕ 11.0	R	400	31432400
ϕ 11.0	R	420	31432420
ϕ 11.0	L	300	31431300
ϕ 11.0	L	320	31431320
ϕ 11.0	L	340	31431340
ϕ 11.0	L	360	31431360
ϕ 11.0	L	380	31431380
ϕ 11.0	L	400	31431400
ϕ 11.0	L	420	31431420



Diameter	Left and Right	Length (mm)	Product NO.
Φ12.0	R	300	31442300
Φ12.0	R	320	31442320
Φ12.0	R	340	31442340
Φ12.0	R	360	31442360
Φ12.0	R	380	31442380
Φ12.0	R	400	31442400
Φ12.0	R	420	31442420
Φ12.0	L	300	31441300
Φ12.0	L	320	31441320
Φ12.0	L	340	31441340
Φ12.0	L	360	31441360
Φ12.0	L	380	31441380
Φ12.0	L	400	31441400
Φ12.0	L	420	31441420

End Cap

Model: **SDDKEIV**
 Material: Ti-6Al-4V

Thread length	Prolong (mm)	Product NO.
M10	0	30390000
M10	5	30390005
M10	10	30390010
M10	15	30390015



Locking End Cap

Model: **SDDKEIV**
 Material: Ti-6Al-4V

Thread length	Prolong (mm)	Product NO.
M10	0	30400000
M10	5	30400005
M10	10	30400010
M10	15	30400015



Locking End Cap

Model: **SDDKEIV**
 Material: Ti-6Al-4V

Thread length	Product NO.
M8	30410010



10.5 Lag Screw

Model: **SDDKSIV**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ10.5	75	30340075
Φ10.5	80	30340080
Φ10.5	85	30340085
Φ10.5	90	30340090
Φ10.5	95	30340095
Φ10.5	100	30340100
Φ10.5	105	30340105
Φ10.5	110	30340110
Φ10.5	115	30340115



6.5 Compression Screw

Model: **SDDKSIV**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ6.5	70	30350070
Φ6.5	75	30350075
Φ6.5	80	30350080
Φ6.5	85	30350085
Φ6.5	90	30350090
Φ6.5	95	30350095
Φ6.5	100	30350100
Φ6.5	105	30350105
Φ6.5	110	30350110




10.5 Helical Blade

Model: **SDDKSIV**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ10.5	75	30370075
Φ10.5	80	30370080
Φ10.5	85	30370085
Φ10.5	90	30370090
Φ10.5	95	30370095
Φ10.5	100	30370100
Φ10.5	105	30370105
Φ10.5	110	30370110
Φ10.5	115	30370115

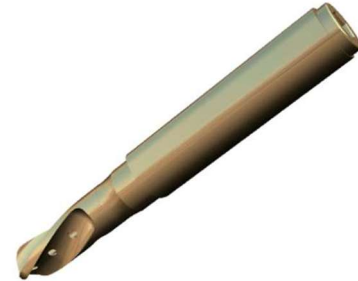

5.0 Locking Screw

Model: **SDDKSIV**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ5.0	25	30360025
Φ5.0	30	30360030
Φ5.0	35	30360035
Φ5.0	40	30360040
Φ5.0	45	30360045
Φ5.0	50	30360050
Φ5.0	55	30360055
Φ5.0	60	30360060
Φ5.0	65	30360065
Φ5.0	70	30360070
Φ5.0	75	30360075
Φ5.0	80	30360080



10.5 Lag Screw (Exclusive use)

Model: **SDDKSII**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ10.5	75	30380075
Φ10.5	80	30380080
Φ10.5	85	30380085
Φ10.5	90	30380090
Φ10.5	95	30380095
Φ10.5	100	30380100
Φ10.5	105	30380105
Φ10.5	110	30380110
Φ10.5	115	30380115



Femoral Reconstruction Nail

Model: **SDDKNVI**


Material: Ti-6Al-4V

The 5° mediolateral angle allows for a more lateral entry point at the tip of the greater trochanter. Head diameter: 13.4mm.

Fitted Screw: ϕ 6.5 Lag Screw, ϕ 5.0 Locking Screw, End Cap.

Scope of application: Femoral fracture fixation

Diameter	Left and Right	Length (mm)	Product NO.
ϕ 9.0	R	300	30542300
ϕ 9.0	R	320	30542320
ϕ 9.0	R	340	30542340
ϕ 9.0	R	360	30542360
ϕ 9.0	R	380	30542380
ϕ 9.0	R	400	30542400
ϕ 9.0	R	420	30542420
ϕ 9.0	L	300	30541300
ϕ 9.0	L	320	30541320
ϕ 9.0	L	340	30541340
ϕ 9.0	L	360	30541360
ϕ 9.0	L	380	30541380
ϕ 9.0	L	400	30541400
ϕ 9.0	L	420	30541420
Φ 10.0	R	300	30552300
Φ 10.0	R	320	30552320
Φ 10.0	R	340	30552340
Φ 10.0	R	360	30552360
Φ 10.0	R	380	30552380
Φ 10.0	R	400	30552400
Φ 10.0	R	420	30552420
Φ 10.0	L	300	30551300
Φ 10.0	L	320	30551320
Φ 10.0	L	340	30551340
Φ 10.0	L	360	30551360
Φ 10.0	L	380	30551380
Φ 10.0	L	400	30551400
Φ 10.0	L	420	30551420
Φ 11.0	R	300	30562300
Φ 11.0	R	320	30562320
Φ 11.0	R	340	30562340
Φ 11.0	R	360	30562360
Φ 11.0	R	380	30562380
Φ 11.0	R	400	30562400
Φ 11.0	R	420	30562420
Φ 11.0	L	300	30561300
Φ 11.0	L	320	30561320
Φ 11.0	L	340	30561340
Φ 11.0	L	360	30561360
Φ 11.0	L	380	30561380
Φ 11.0	L	400	30561400
Φ 11.0	L	420	30561420

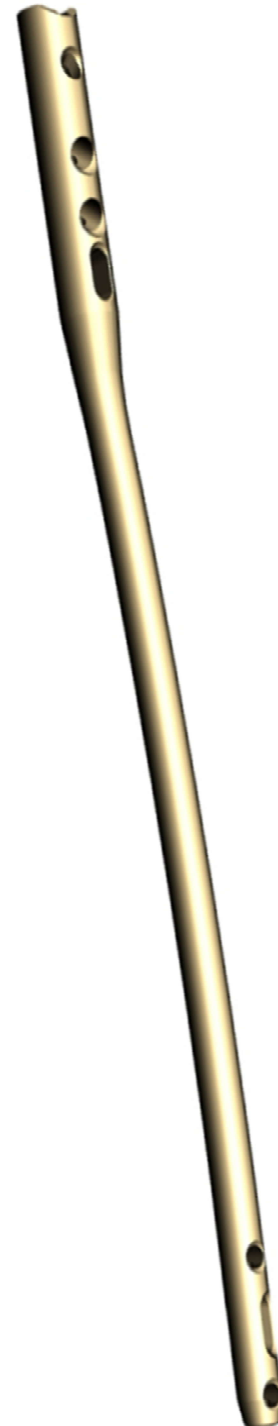

6.5 Lag Screw

 Model: **SDDKSVI**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ6.5	65	30580065
Φ6.5	70	30580070
Φ6.5	75	30580075
Φ6.5	80	30580080
Φ6.5	85	30580085
Φ6.5	90	30580090
Φ6.5	95	30580095
Φ6.5	100	30580100
Φ6.5	105	30580105
Φ6.5	110	30580110
Φ6.5	115	30580115




5.0 Locking Screw

 Model: **SDDKSIV**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ5.0	25	30360025
Φ5.0	30	30360030
Φ5.0	35	30360035
Φ5.0	40	30360040
Φ5.0	45	30360045
Φ5.0	50	30360050
Φ5.0	55	30360055
Φ5.0	60	30360060
Φ5.0	65	30360065
Φ5.0	70	30360070
Φ5.0	75	30360075
Φ5.0	80	30360080

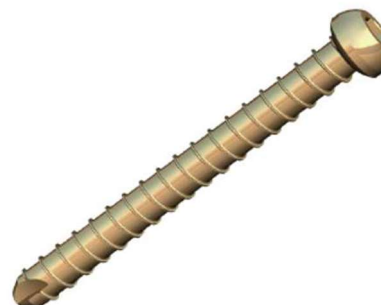

End Cap

 Model: **SDDKEVI**

Material: Ti-6Al-4V

Thread length	Prolong (mm)	Product NO.
M10	0	30590000
M10	5	30590005
M10	10	30590010
M10	15	30590015



Tibial Nail

Model: **SDSXNI**


Material: Ti-6Al-4V

The nail head is angled forward at 8°. Head diameter: 11.0mm.

Fitted Screw: $\varphi 4.3$ Locking Screw, $\varphi 4.8$ Locking Screw, End Cap.

Scope of application: Tibial fracture fixation

Diameter	Length (mm)	Product NO.
Φ8.0	255	30460255
Φ8.0	270	30460270
Φ8.0	285	30460285
Φ8.0	300	30460300
Φ8.0	315	30460315
Φ8.0	330	30460330
Φ8.0	345	30460345
Φ8.0	360	30460360
Φ8.0	375	30460375
φ9.0	255	30470255
φ9.0	270	30470270
φ9.0	285	30470285
φ9.0	300	30470300
φ9.0	315	30470315
φ9.0	330	30470330
φ9.0	345	30470345
φ9.0	360	30470360
φ9.0	375	30470375
Φ10.0	255	30480255
Φ10.0	270	30480270
Φ10.0	285	30480285
Φ10.0	300	30480300
Φ10.0	315	30480315
Φ10.0	330	30480330
Φ10.0	345	30480345
Φ10.0	360	30480360
Φ10.0	375	30480375

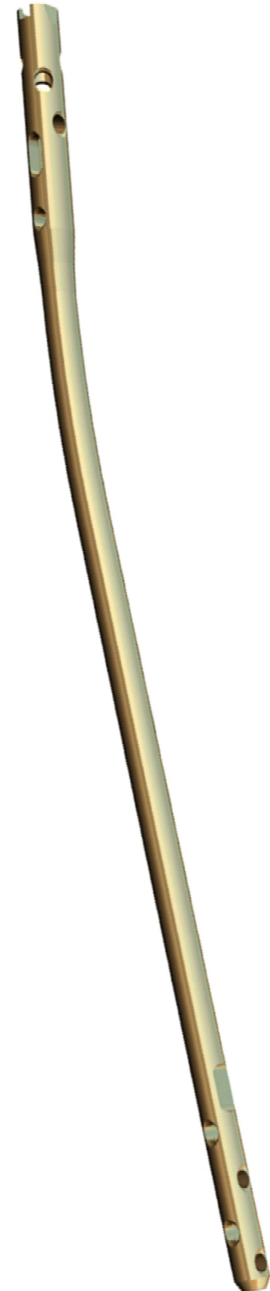

4.8 Locking Screw

Model: **SDSXS1**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ4.8	25	30510025
Φ4.8	30	30510030
Φ4.8	35	30510035
Φ4.8	40	30510040
Φ4.8	45	30510045
Φ4.8	50	30510050
Φ4.8	55	30510055
Φ4.8	60	30510060
Φ4.8	65	30510065
Φ4.8	70	30510070
Φ4.8	75	30510075
Φ4.8	80	30510080
Φ4.8	85	30510085
Φ4.8	90	30510090



4.3 Locking Screw

Model: **SDSXS1**

Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ4.3	25	30500025
Φ4.3	30	30500030
Φ4.3	35	30500035
Φ4.3	40	30500040
Φ4.3	45	30500045
Φ4.3	50	30500050
Φ4.3	55	30500055
Φ4.3	60	30500060
Φ4.3	65	30500065
Φ4.3	70	30500070
Φ4.3	75	30500075
Φ4.3	80	30500080



End Cap

Model: **SDSXEI**

Material: Ti-6Al-4V

Thread length	Prolong (mm)	Product NO.
M10	0	30520000
M10	5	30520005
M10	10	30520010
M10	15	30520015



Filling Nail

Model: SHCL06
 Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ1.5	1.5	31340015
Φ2.0	2	31350020
Φ2.4	2	31360024
Φ2.7	2.5	31370027
Φ3.5	3.5	31380035
Φ5.0	5	31390050
Φ6.5	5	31400065



Filling Nail round head

Model: SHCQ06
 Material: Ti-6Al-4V

Diameter (mm)	Length (mm)	Product NO.
Φ1.5	1.5	WD31340015
Φ2.0	2	WD31350020
Φ2.4	2	WD31360024
Φ2.7	2.5	WD31370027
Φ3.5	3.5	WD31380035
Φ5.0	5	WD31390050
Φ6.5	5	WD31400065

